

Communication Enclosures

Technical Characteristics:-


- Box & Door Thickness (mm) : 1.50
- IP : 4X
- RAL : 7032 (Cool)
- Mounting : Flush & Surface
- Top & Bottom Cable entry for Flush mounting
- Top , Bottom & Rear Cable entry for Surface mounting / Top , bottom cable entry for flush mounting




Features :-

- Made of high quality steel sheet
- Electrostatic Powder Coating
- 120 degree Opening Door
- Reversible Door
- Suitable for Installing (Power Sockets, Router, Switches & Data Sockets)
- Good ventilation Design

Drawings :-

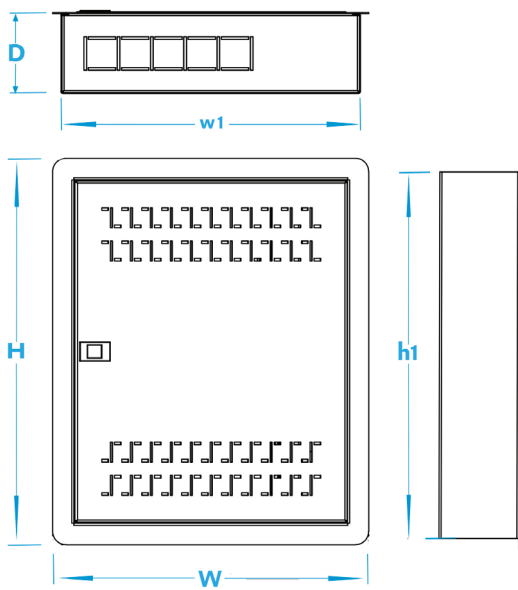

Flush Mounted

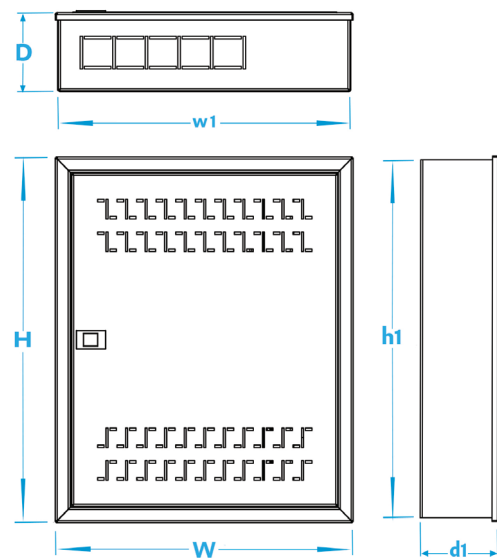

Wall Mounted

Order Codes:-

Mounting	Codes	Thickness (mm)	Cable entry	Dimensions (mm)					
				H	W	D	h1	w1	d1
Flush Mounted	BE.ONT.F	1.50	Top/Bottom	580	475	122	550	450	120
Wall Mounted	BE.ONT.S	1.50	Top/Bottom / Rear	562	457	122	550	450	120